



MODEL R PREMIUM PRO

Outfit your grow room with our high-efficiency 4' x 4' lighting units. With less upfront operating expense, you'll generate more ROI from a high-yield crop.

Our lights add spectrum controls via a multi-channel dimmer that allows users to tailor their crop for even greater yields and performance.



MODEL R PREMIUM PRO





Scan or click the QR code to view the installation guide.

SPECIFICATIONS

Light Intensity (PPF)	1800 $\mu\text{mol/s}$	Waterproofing	IP65
System Efficiency	3.0 $\mu\text{mol/J}$	Operating Temperature	10°C to 35°C (50°F to 95°F)
Spectrum Adjustability	Adjustable (2-channel)	Weight	18.3lbs (driver mounted remotely) 30lbs (driver mounted on fixture)
Beam Angle	120°	Certification	DLC, UL 8800, UL 1598 Wet Rated, UL 8750, NSF & FCC
Dimmability	Yes (0 - 10V)	Thermal Management	Passive
Lifetime	> 55,000 hours (Q90)	Warranty	5 Year Standard Warranty

SPECTRUM

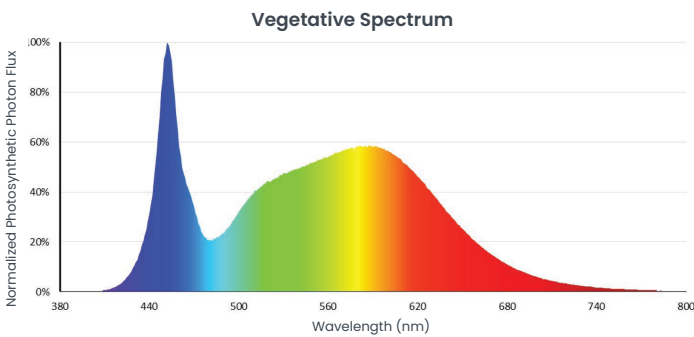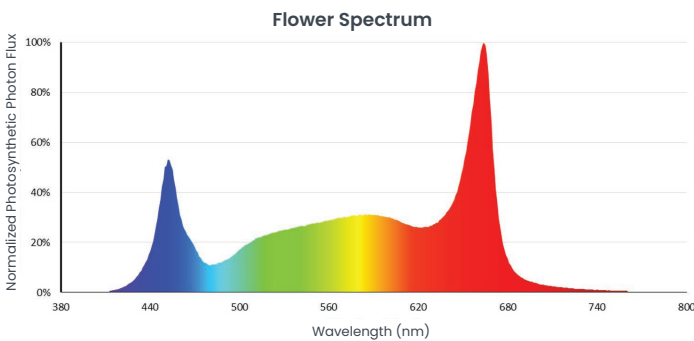

ELECTRICAL

Input Voltage (AC)	120V	208V	240V	277V
Input Power (AC)	620W	610W	605W	600W
Maximum Current	5.75A	3.25A	2.8A	2.5A
Power Factor	0.999	0.993	0.983	0.97

DIMENSIONS

